


Grafica's nano-print plus pneumatic

- Max Print Area: 22" x 28" (559 x 711 mm)
- Single Phase

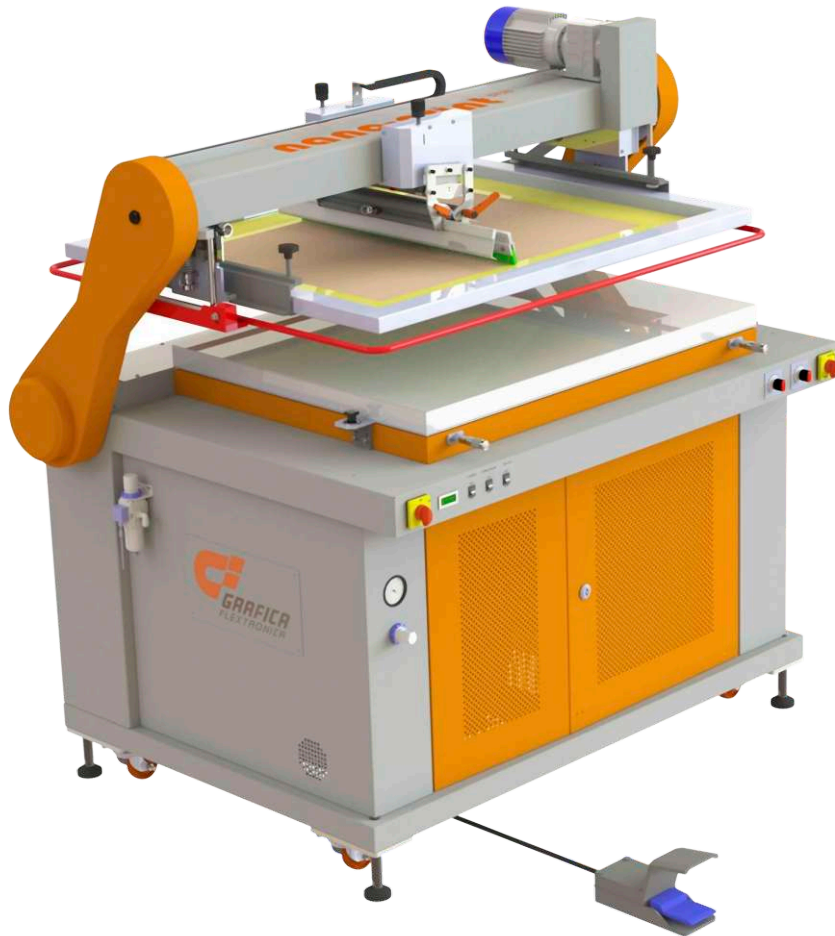

plus features:

1. Adjustable screen frame holder
2. Variable printing stroke length
3. Single/Double stroke selection
4. Digital Stroke Counter
5. Parallel screen frame movement (Convenient for spot UV varnish and low viscosity inks to avoid ink spillage all over the screen)
6. Peel off mechanism (To achieve fine reproduction of halftone dots and avoid smudging, bleeding and smearing)

plus Pneumatic features:

1. Pneumatic squeegee pressure equalizer obtains perfect registration and consistent color reproduction with even ink deposition all over the image area.
2. Pneumatic squeegee pressure regulator with pressure gauge to set optimum pressure for perfect registration and job repetition accuracy thus minimizes squeegee wear and tear.
3. Quick and easy tool free squeegee / flood bar clamping and removing mechanism.
4. Adjustable tool free squeegee angle setting mechanism;

plus 'optional' features:

1. Vacuum by foot (to register on curly and unstable paper/ substrates accurately and easily)

Technical Features

1. PLC (Programmable logic controller)
2. High quality electrical components
3. AC Motor of Class "F" Insulation
4. VFD (Variable Frequency Drive) for precise speed control
5. Imported geared motor (lifetime lubricated)
6. High quality steel fabrication
7. High quality pressure die-cast aluminum parts
8. Hard anodized aluminum extrusions
9. All moving parts hardened for longer life
10. Honey comb vacuum bed with stainless steel top
11. Zero backlash precision micrometer for vacuum bed movement to get accurate registration
12. Compact powerful vacuum blower to hold substrate firmly while printing
13. Squeegee head motion on precision imported guide rails
14. Imported timing belt for squeegee head movement
15. Independent squeegee and flood bar pressure control
16. Aluminum extruded squeegee holder
17. Aluminum extruded flood bar with 0.5 mm edge to print consistent halftones thus reduces ink deposition
18. Optional stainless steel edged flood bar to print ceramic / glass inks
19. Hard nickel plated metal parts to avoid corrosion
20. Hardened cams and shafts to increase life of machine thus reduces wear and tear
21. Castor wheels for easy mobility
22. Foot switch for easy operation
23. Auto mode to bypass foot switch
24. Safety bars to avoid accident
25. High safety standards


Technical Data

Description	GF-2228 NPP-PNU
Max Print Area	22" x 28" (559 mm x 711 mm)
Vacuum Bed	26.7" x 35.9" (678 mm x 912 mm)
Vacuum Bed Movement for Registration	± 7 mm
Screen Frame Size	Min: 26" x 20" (660 mm x 508 mm) Max: 34" x 40" (864 mm x 1016 mm)
Max Off-Contact	10 mm
Max Substrate Thickness	5 ~ 7 mm (Depends on mesh tension)
Screen Frame Thickness	1.0"~1.5"
Squeegee Holders	16" (406 mm) min & 24" (610 mm) max
Flood Coater	20" (508 mm) min & 26" (660 mm) max
Power Consumption	220V AC, single phase, 6 Amps, 50 Hz 1.5 HP (1.2 kW)
Compressed Air*	Max 6 kg / cm ² , 3 - 5 CFM
Dimensions (in mm)	1428 x 1015 x 1244 mm
Weight	310 Kg



nano-print plus
pneumatic

Advantages

1. Single phase (plug n play)
2. Reduces manpower
3. Minimum maintenance
4. Minimum settings
5. Quick job changeover, faster production
6. No hidden cost, it's fully featured
7. Lower squeegee rubber cost (8 x 30 mm)
8. Requires less space 4.7' x 4.0' = approx. 19 sq. ft.
9. Screen frame holder compatible with aluminum, metal & wooden frames
10. Print with any types of solvent, plastisol and UV inks
11. Minimum investment, faster returns



Machine Dimension (in mm)

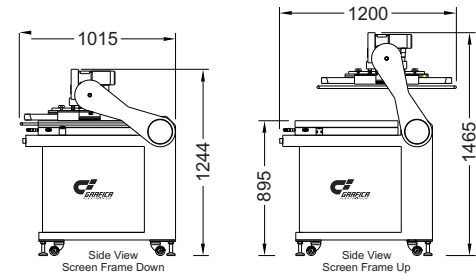

Precision Guide Rail




Pneumatic squeegee pressure equalizer with quick tool free, squeegee / flood bar clamping and removing with adjustable squeegee angle mechanism



High Quality AC Geared Motor



PLC (Programmable logic controller) and High Quality Electrical Components




Imported timing belt for squeegee head movement



Compact Powerful Vacuum Blower



VFD (Variable Frequency Drive) for precise speed control



Sturdy, light weight honey comb vacuum bed with stainless steel top and precision micrometer to get accurate registration



GRAFICA FLEXTRONICA

3 "SAURABH - A", Ground Floor, Sahaji Rajee Marg,
Vile Parle (E), Mumbai - 400 057, Maharashtra, India.
Tel: +91 22 26838815 / 6 Email: sales@graficaindia.com
Mobile: 9920466687 / 9920466617
www.grficaindia.com



A Division of Grafica Flextronica

LEARN MORE | EARN MORE:
Educational Workshops & Seminars at DMI
Log on to www.grficaindia.com to register
for the next workshop.

Note:

- Continues improvement is an on going process at Grafica Flextronica, hence technical specifications, features and data are subject to change without notice.
- Use servo stabilizer for voltage controller for safety of machine from excess voltage from main supply

* Grafica Flextronica does not supply AIR compressor hence buyer of Nano-Print plus (Pneumatic) has to arrange the required capacity compressor to supply dry air to the machine.

Our Representatives: